




PFS 5T UK



User's instructions _____ 3



دليل الاستعمال _____ 4

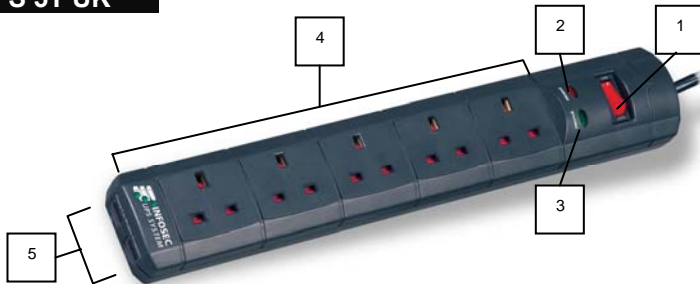

Technical specifications

General Data	
5 protected power outlets with child safety (UK connector)	
Non-flammable plastic casing. Wall attachment possible	
13 A fuse inside the mains plug	
Power supply active / power supply inactive mode switch	
Dimensions (w x d x h): 60 x 400 x 40 mm	
Weight: 600 g	
Cable length: 1.8 m	
Conformity with the CE standard	
Lifetime warranty	
Surge Protection Performance	
Power rating	250 VAC / 13 A
Peak voltage	775 Volts
Surge energy rating	238 Joules (Hot – Neutral)
Peak current 8/20 μ s	6500 A
Response time	< 1 nanosecond
EMI/RFI filter	
Frequency range	150 kHz ~ 100MHz
Attenuation up to	40 dB
Light indicators	
Red light on	protection device active
Green light on	correct earthing
Phone - fax - modem - xDSL protection	
Peak voltage	395 Volts
Maximum surge energy	320 Joules
Environment	
Temperature	0 to 40° Celsius
Relative humidity	0 to 95 % relative humidity



The **PFS 5T UK** was designed to give the highest degree of protection against overloads and voltage peaks, electromagnetic interference (EMI) and radio frequency interference (RFI).

It protects your computer, peripherals and hi-fi equipment against damage caused by voltage peaks, lighting and overloads.

Security

Please read all these instructions before installing the **PFS 5T UK**.

It must only be installed indoors in a protected location in which the temperature and humidity do not exceed the limits specified in the technical characteristics section.

Installation

Plug the **PFS 5T UK** into a power outlet with earth.

Put the switch into the « ON » position.. Plug your equipment to be protected into the 5 sockets of the **PFS 5T UK**.

If the red «protected» light on the protection device is off, do not use the **PFS 5T UK**.

Do not disassemble the **PFS 5T UK** if you have any problems, there are no repairable parts inside it. Call the hotline.

1. Mains switch with light

The mains one-pole switch of the **PFS 5T UK** switches the 5 sockets on and off.

2. Overload protection

When the consumption of connected equipment exceeds the authorized value, the 13 A fuse included inside the mains plug blows to protect the **PFS 5T UK**.

To put it back into service, reduce the power and replace the fuse located inside the mains plug by a new one with same power characteristics.

3. Overvoltage protection

Lighting green light: earthing is effective.

Unlighting green light: no earthing.

Check the earth connection of the main power or call a qualified electrician.

4. Earthing

The green light lights up to indicate when earthing is effective.

5. Sockets

Power outlets are used for connections of equipment such as a PC, printer, monitor, scanner, CD-ROM external drives, hi-fi systems, VCR, home DVD player, etc. This equipment is controlled by the mains switch.

6. Fax and Modem protection

The **PFS 5T UK** is equipped with protection against overvoltages on the phone / fax / modem line (UK phone sockets – 6P4C). Connect the line input to the "IN" connector and use the cable supplied to the "OUT" connector to the phone / fax / modem.

تم تصميم مشترك مخارج "فيش" PFS 5 T UK يؤمن أعلى مستويات الحماية ضد تذبذب التيار الكهربائي والارتفاعات المفاجئة في التيار. إنه يحمي حاسوبك والأجهزة المتصلة به والأجهزة عالية الأمانة من الأضرار المترتبة على تذبذب التيار الكهربائي والصواعق والارتفاعات المفاجئة في التيار. المشترك مجهز بفواصل يمكن إعادة توصيله من أجل الحماية ضد الارتفاعات المفاجئة وانفصال الدائرة.

الأمان

برجاء قراءة الإرشادات التالية قبل الشروع في تركيب مشترك PFS 5 T UK. يجب حتما تركيب المشترك في الداخل في مكان محمي لا تزيد درجة الحرارة والرطوبة فيه عن الحدود الواردة في فقرة المواصفات الفنية.

التركيب

قم بتوصيل المشترك في مدخل فيش أرضي. انقل المفتاح العام على وضع التشغيل وتأكد من أنه يضيء. إذا لم يضيء تأكد من سلامة الوصلة الكهربائية. قم بتوصيل الأجهزة التي تريد حمايتها في المخارج الست التي تكوّن المشترك PFS 5 T UK. إذا قابلت أي مشكلة لا تحاول حلها بفك المشترك PFS 5 T UK فإنه لا يحتوي على أي قطع يمكن تصليحها. اتصل بالخدمة بعد البيع.

1. مفتاح عام ببيان ضوئي

مفتاح المشترك PFS 5 T UK العام الثنائي القطبية يسمح بتوصيل وفصل 6 مخارج "فيش". يكون لون البيان أحمر عند اشتغال نظام الحماية ووصول التيار للمخارج "الفيش".

2. المخارج "الفيش"

تستعمل المخارج لتوصيل الأجهزة المختلفة مثل الحاسوب والطابعة وشاشة العرض والماسح وقارئ الأقراص الخارجي وجهاز الستريو والمسجل وقارئ DVD أقراص المنزلي وما شابهها. تخضع جميع الأجهزة الموصلة بالمشارك للمفتاح العام. المخرج السادس الذي يبتعد عن الآخرين يسمح بتوصيل مخرج بمحول.